

**汕头市昇德自动化设备有限公司**  
**SHENGDE SHANTOU AUTOMATION EQUIPMENT CO.,LTD.**



## ➔ 企业简介


# COMPANY PROFILE

汕头市昇德自动化设备有限公司，是一家专业电工胶带，布基胶带，美纹纸胶带，bopp胶带，地板胶带，管道胶带，全自动切纸管机等外包装自动化设备，销售，售后服务为一体的企业。公司以“快速”、“可靠”、“稳定”为核心价值，为许多客户提供了好性能，可靠的产品和服务，本设备已经在胶粘带外包装行业，得到广大客户的好评及信赖，我们的产品已经销往各地。

昇德本着“质量保证，诚信服务，及时到位”的做事态度长期以往的服务于每一位新老客户。在此，感谢新老客户的长期支持，因为您的关注我们将更加专注。

ShanTou ShengDe Automation Equipment Co., Ltd. is a professional electrical tape, cloth tape, masking tape, bopp tape, floor tape, duct tape, automatic paper cutter and other outer packaging automation equipment, sales, after-sales service for One enterprise. The company takes "fast", "reliable" and "stable" as its core values, and provides many customers with good performance and reliable products and services. This equipment has been used in the adhesive tape packaging industry and has won praise and trust from customers. Our products have been sold all over the world.

ShengDe has been serving every new and old customer for a long time in line with the attitude of "quality assurance, honest service, timely delivery". Here, thank new and old customers for their long-term support, because of your attention we will be more focused.

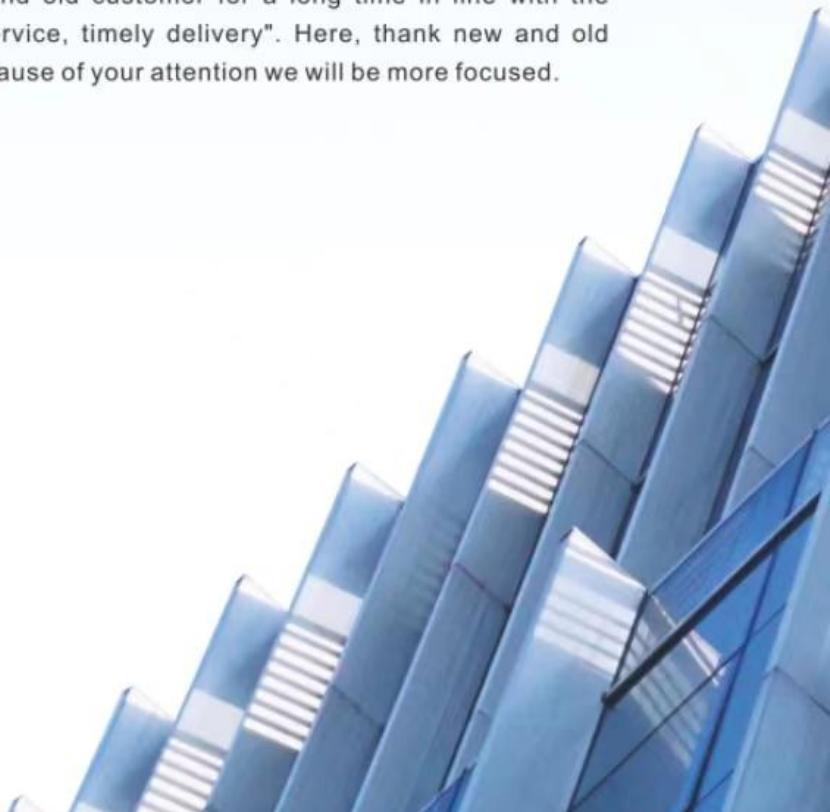

# SD- F001

## 四轴全自动数控切纸管机

Four-axis automatic CNC paper cutter


多刀同步切管



安全光栅  
自动报警



自动分离料头料尾



图片仅供参考,实物会根据要求改变为准,最终解释权归昇德所有。

一键智能 | 低能耗 | 稳定性 | 自动分条

- 1.不同规格无需换刀(输入参数即可)。
- 2.料头料尾自动排除。
- 3.故障报警自动停机。
- 4.无线远程APP监控及系统升级。
- 5.纸管厚度可调。
- 6.占地面积小,耗电量低。
- 7.操作简单,维护方便。

1. There is no need to change the tool for different specifications (just input the parameters).
2. The material head and material tail are automatically excluded.
3. Automatic shutdown after failure alarm.
4. Wireless remote APP monitoring and system upgrade.
5. The thickness of the paper tube is adjustable.
6. Small footprint and low power consumption.
7. Simple operation and convenient maintenance.

Speed of cutting	20-40 times/min	Voltage	AC380V-4P	Model	F001
Tube total length	1260mm -1330mm	Total power	2.5kW/h	Size of machine	2250mm*850mm*1750mm
Cut tube size range	76-79mm	Air Consumption	0.6Mpa	Weight	750kg






# SD-77

## 胶带单卷热收缩膜包装机

Tape Single Roll Heat Shrink Film Packaging Machine

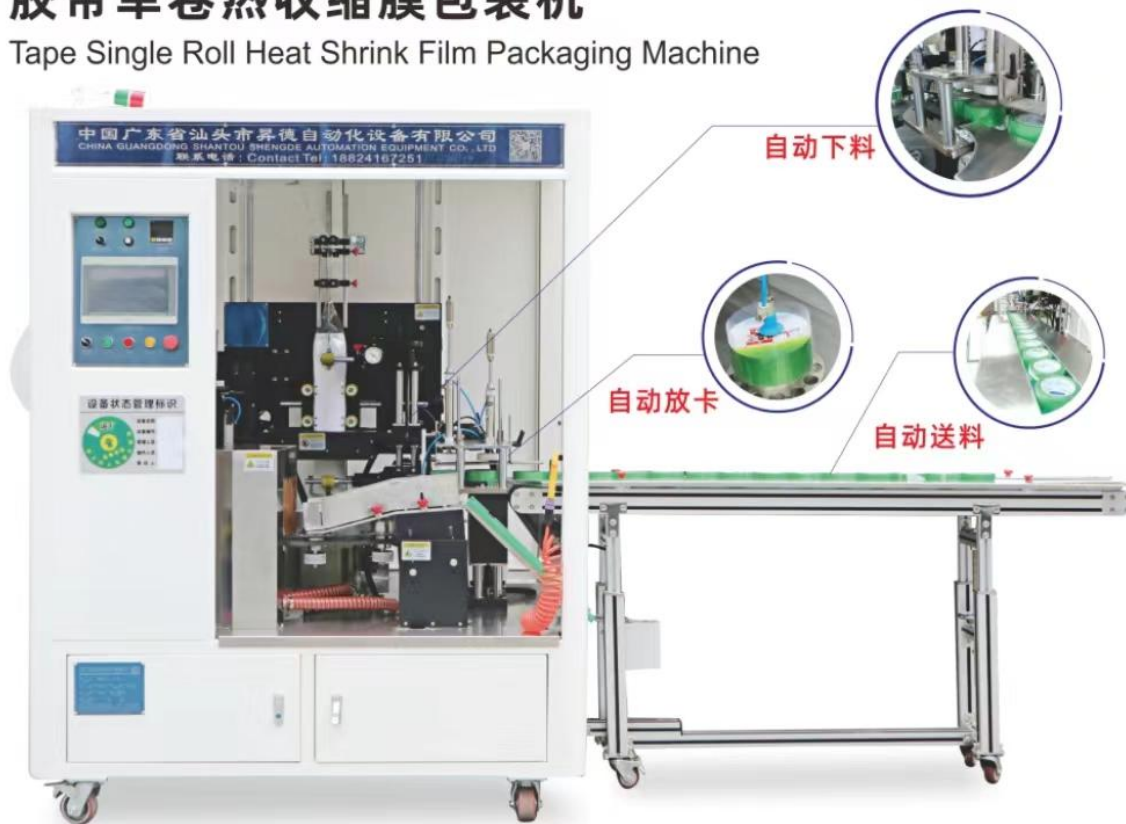

图片仅供参考,实物会根据要求改变为准,最终解释权归昇德所有。

一键智能 | 低能耗 | 稳定性

1. 人机界面, 微电脑可编程控制。
2. 故障自动报警, 一键智能操作。
3. 机械手吸纸标。
4. 恒温可调节温度控制系统。
5. 低能耗。
6. 模具更换方便快捷。
7. 转盘结构, 小巧轻便。
8. 伺服电机传动。
9. 印刷膜及纸卡功能双用。

用途: 各种胶带收缩膜+纸卡包装。

1. Man-machine interface, programmable control of micro-computer.
2. Automatic fault alarm, one key intelligent operation.
3. High-precision mechanical hand paper-sucking label.
4. Constant temperature adjustable temperature control system.
5. Low energy consumption and high efficiency.
6. Could replacement is convenient and fast.
7. Turntable structure, compact and portable.
8. Servo motor, high precision transmission.

Usage: All kinds of tape shrinkage film + paper card packaging.

<b>Packaging speed</b>	45-60pcs/min	<b>Voltage</b>	AC380V-4P	<b>Thickness of roll film</b>	0.04mm-0.045mm(Shrinkage 50%)
<b>Packing width</b>	15-50mm	<b>Total power</b>	6kW/h	<b>Dimensions</b>	1600mm*1600mm*2200mm
<b>Packing diameter</b>	90-130mm (Other sizes can be customized)	<b>Air Consumption</b>	0.5Mpa	<b>Weight</b>	1000kg

# SD-60SS

## 电工胶带单个热收缩膜全自动包装机

Automatic packaging machine for single shrink film of electrical tape



图片仅供参考,实物会根据要求改变为准,最终解释权归昇德所有。

一键智能 | 低能耗 | 稳定性

1. 人机界面, 微电脑可编程控制。
2. 故障自动报警, 一键智能操作。
3. 机械手吸纸标。
4. 恒温可调节温度控制系统。
5. 低能耗。
6. 模具更换方便快捷。
7. 转盘结构, 小巧轻便。
8. 伺服电机传动。

用途: 各种胶带收缩膜+纸卡包装。

1. Man-machine interface, programmable control of micro-computer.
2. Automatic fault alarm, one key intelligent operation.
3. High-precision mechanical hand paper-sucking label.
4. Constant temperature adjustable temperature control system.
5. Low energy consumption and high efficiency.
6. Could replacement is convenient and fast.
7. Turntable structure, compact and portable.
8. Servo motor, high precision transmission.

Usage: All kinds of tape shrinkage film + paper card packaging.

Packaging speed	60-68pcs/min	Voltage	AC380V-4P AC220V single phase electricity	Paper tube diameter	76-79(Can be customized)
Packing width	15-50mm	Total power	4.5kW/h	Size of machine	1500mm*150mm*1850mm
Packing diameter	52-98mm (Can be customized)	Air Consumption	0.5Mpa	Weight	1000kg



昇德®

http://电工胶带包装机.中国

专利号: ZL 201720456709.1/ZL 201910488749.8/ZL 201920846007.3/ZL202021994391.0/ZL202021992760.2

# SD-55

## 电工胶带单卷多功能折角包装机

Electrical Tape Single Roll Multifunctional Folding Corner Packing Machine



图片仅供参考,实物会根据要求改变为准,最终解释权归昇德所有。

一键智能 | 低能耗 | 稳定性

1. 人机界面, 微电脑可编程控制。
2. 故障自动报警, 一键智能操作。
3. 机械手吸纸标。
4. 恒温可调节温度控制系统。
5. 低能耗。
6. 模具更换方便快捷。
7. 转盘结构, 小巧轻便。
8. 伺服电机传动。

用途: 各种胶带收缩膜+纸卡包装。

1. Man-machine interface, programmable control of micro-computer.
2. Automatic fault alarm, one key intelligent operation.
3. High-precision mechanical hand paper-sucking label.
4. Constant temperature adjustable temperature control system.
5. Low energy consumption and high efficiency.
6. Could replacement is convenient and fast.
7. Turntable structure, compact and portable.
8. Servo motor, high precision transmission.

Usage: All kinds of tape shrinkage film + paper card packaging.

Packaging speed	50-65pcs/min	Voltage	AC220-2P	Paper tube diameter	76-79(Can be customized)
Packing width	12-15mm	Total power	1.5kW/h	Size of machine	1100*1900*1900 1100*1100*1200
Packing diameter	50-82mm (Can be customized)	Air Consumption	0.5Mpa	Weight	950kg



昇德®

http://胶带包装机.中国

专利号: ZL 2022 2 0358275. 2/ZL 2022 2 0359457. 1/ZL 2022 3 0084876. 4

# SD-1010

## 半自动袖口筒式包装机

Semi-Auto Cuff Cartridge Packaging Machine



图片仅供参考,实物会根据要求改变为准,最终解释权归昇德所有。

一键智能 | 低能耗 | 稳定性

1. PLC可编程控制系统
2. 人机智能操作系统
3. 恒温可调节温控系统
4. 低耗能, 高效率
5. 可调节推料结构
6. 有料自动检测运行功能

1. PLC programmable control system.
2. Human-machine intelligent operating system.
3. Constant temperature adjustable temperature control system.
4. Low energy consumption, high efficiency.
5. Adjustable pusher structure.
6. Automatic detection and running function of materials.

<b>Packaging speed</b>	0-20pcs/min	<b>Maximum length</b>	450mm	<b>Voltage</b>	AC220V/50-60Hz
<b>Total power</b>	0.6kW/h	<b>Maximum height</b>	200mm	<b>Size of machine</b>	1200*1000*1750
<b>Air Consumption</b>	4-6Mpa	<b>Maximum width</b>	400mm	<b>Weight</b>	120kg



# SD-1020

## 全自动袖口筒包装机 Automatic cuff tube packing machine



图片仅供参考,实物会根据要求改变为准,最终解释权归昇德所有。

一键智能 | 低能耗 | 稳定性

1. PLC可编程控制系统
2. 人机智能操作系统
3. 恒温可调节温控系统
4. 低耗能, 高效率
5. 可调节推料结构
6. 有料自动检测运行功能

1. PLC programmable control system.
2. Human-machine intelligent operating system.
3. Constant temperature adjustable temperature control system.
4. Low energy consumption, high efficiency.
5. Adjustable pusher structure.
6. Automatic detection and running function of materials.

<b>Packaging speed</b>	0-25pcs/min	<b>Maximum length</b>	450mm	<b>Voltage</b>	AC220V/50-60Hz
<b>Total power</b>	0.6kW/h	<b>Maximum height</b>	200mm	<b>Size of machine</b>	1200*1000*1750
<b>Air Consumption</b>	4-6Mpa	<b>Maximum width</b>	400mm	<b>Weight</b>	120kg





Inside the manufacture



# 汕头市昇德自动化设备有限公司

## SHANTOU SHENGDE AUTOMATION EQUIPMENT CO.,LTD.

📍 汕头市金平区赤窖大道潮汕路旁四十亩片四栋之二  
2nd Floor, Building 4, Forty acres, Chijiao Avenue, Jinping District, Shantou City.

WhatsApp: +86 15918497251  
Email: sdharrylau101@gmail.com

Wechat: +86 15918497251  
Facebook: Tape Packing Equipment